


# Pileco P23 Vibro Hammer

10/2008

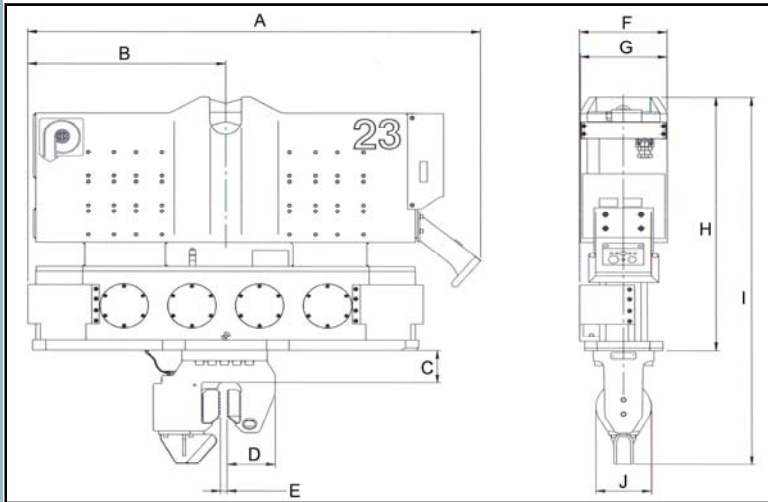

A	2546 mm	100 in
B	1112 mm	44 in
C	200 mm	7.87 in
D	271 mm	10.7 in
E	0-37 mm	0-1.46 in
F	490 mm	19.3 in
G	486 mm	19.1 in
H	1566 mm	61.7 in
I	2271 mm	89.4 in
J	310 mm	12.2 in

## Specifications

Eccentric moment	23 kgm	1996 In-lb	<b>Powerpack</b>		
Max. centrifugal Force	645 kN	72.5 ton	Model	P350	
Max. Frequency	1600 RPM	1600 VPM	Power	250 KW	335 HP
Max. amplitude excl. clamp	19.5 mm	.77 in	Weight	5600 kg	12346 lb
Max. amplitude incl. clamp	16 mm	.63 inch			
Max static line-pull	360 kN	40.5 ton			
Max. hydraulic power	193 kw	262 hp			
Max. operating pressure	340 bar	4931 psi	<b>Clamps:</b>		
Max. oil flow	340 l/min	169 g/min	160 Clamp:		
Dyn. Weight excl. clamp	2350 kg	5180 lb	Force	1425 kN	160 ton
Dyn. Weight incl. clamp	2840 kg	5467 lb	Weight	965 kg	2127 lb
Total weight incl. clamp	4390 kg	9678 lb	Opening	50 mm	1.97 in
Transport weight	4740 kg	10450 lb	LxWxH	1186 305 640	mm
Hose Length	45 m	150 ft	LxWxH	46.7 12.0 25.2	in



Pileco, Inc.  
P.O. Box 16099, Houston, TX 77222  
Toll Free 800-4PILECO (800-474-5326)  
Tel: 713-691-3000, Fax 713-691-0089  
e-mail: pileco@pileco.com

A Member of the BAUER Group

*Technical Specifications are subject to change without prior notice and incurring responsibility for machines previously sold. The shown machines may have special equipment. technical data do not consider power losses.*