


Pileco P46 Vibro Hammer

10/2008

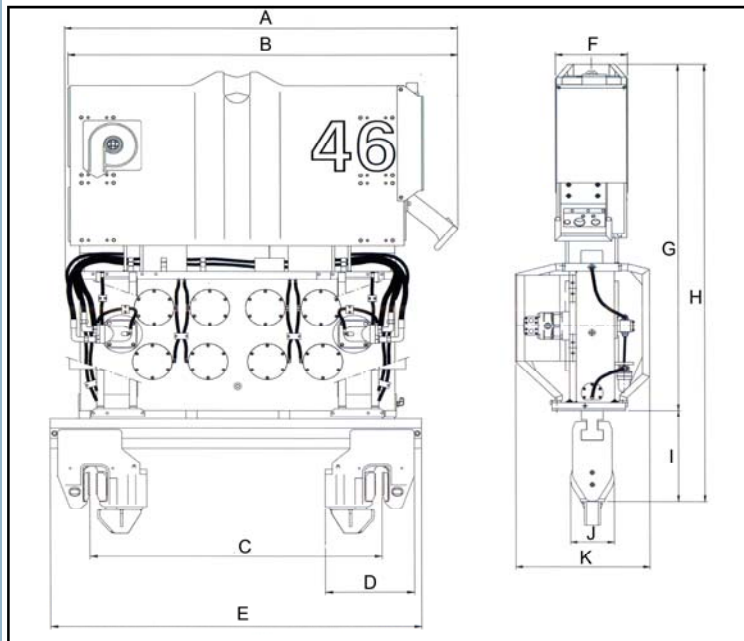

A	2700 mm	106 in
B	2666 mm	105 in
C	450-2950 mm	17.75 - 116 in
D	610 mm	24 in
E	1520-3400 mm	60-134 in
F	495 mm	19.5 in
G	2600 mm	102 in
H	3250 mm	128 in
I	676 mm	27 in
J	300 mm	12 in
K	920 mm	36 in

Specifications

Eccentric moment	46 kgm	3993 In-lb	Powerpack		
Max. centrifugal Force	1250 kN	140 ton	Model	P550	
Max. Frequency	1570 RPM	1570 VPM	Power	403 KW	540 HP
Max. amplitude excl. clamp	23.5 mm	.93 in	Weight	7300 kg	16094 lb
Max. amplitude incl. clamp	18 mm	.71 in	Forced Lubrication		
Max. static line-pull	400 kN	45 ton	Max oil flow	14 l/min	3.7 g/min
Max. hydraulic power	346 kw	470 hp			
Max. operating pressure	340 bar	4931 psi	Clamps		
Max. oil flow	610 l/min	161 g/min	160 Clamp:		
Dyn. Weight excl. clamp	3950 kg	8408 lb	Force	1425 kN	160 ton
Dyn. Weight incl. clamp	5050 kg	11133 lb	Weight	965 kg	2127 lb
Total weight incl. clamp	8550 kg	18849 lb	Opening	50 mm	1.97 in
Transport weight	9250 kg	20392 lb	LxWxH	1186 305 640	mm
Hose Length	46 m	150 ft	LxWxH	46.7 12.0 25.2	in



Pileco, Inc.
 P.O. Box 16099, Houston, TX 77222
 Toll Free 800-4PILECO (800-474-5326)
 Tel: 713-691-3000, Fax 713-691-0089
 e-mail: pileco@pileco.com

A Member of the BAUER Group

Technical Specifications are subject to change without prior notice and incurring responsibility for machines previously sold. The shown machines may have special equipment. technical data do not consider power losses.